


HSE TOOLBOX TALK

LIFTING OPERATIONS

PURPOSE AND SCOPE

Review dropped-load, crushing, impact, overturning, overloading and communication hazards during lifting operations, and verify the lifting plan, competent personnel, equipment suitability and work-area controls before starting. A lifting operation involves more than the crane itself. The operator, rigger, signaller, lifting accessories, ground conditions, wind, load centre of gravity and work area must be considered together.

KEY HAZARDS

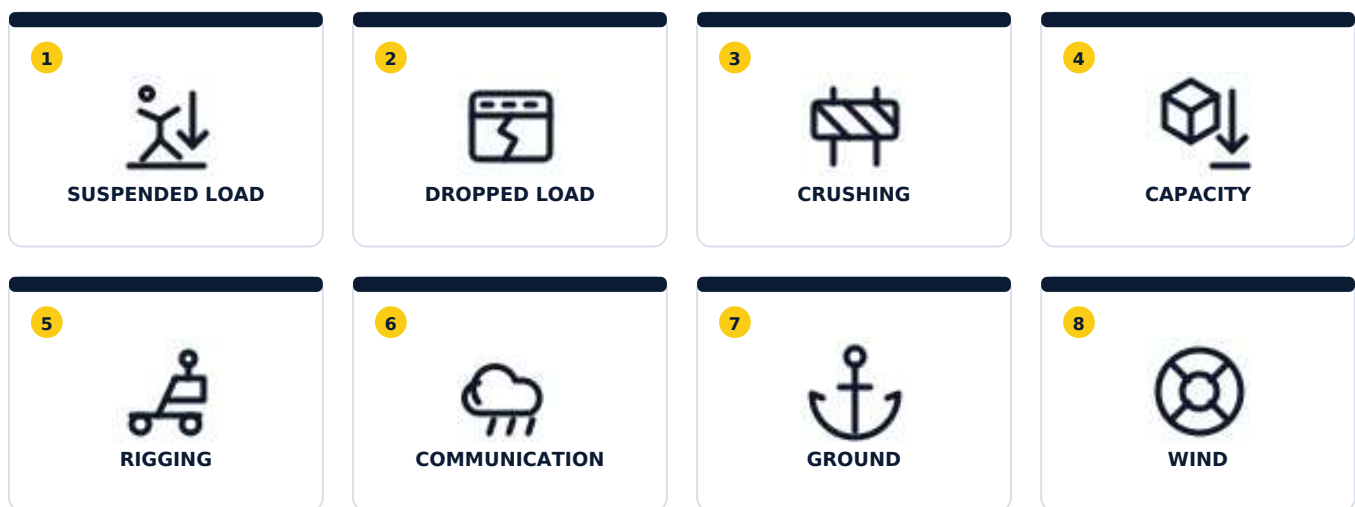

CRITICAL VALUES TO VERIFY IN THE FIELD

100%

Load weight and capacity verification

1 signal person

Designated person directing the operator

0

People below a suspended load



REMEMBER - SERNEM

S

Stop and think

E

Evaluate the risk

R

Remove or reduce

N

Never assume

E

Ensure protection

M

Monitor and communicate

HSE TOOLBOX TALK

LIFTING OPERATIONS

STANDARDS AND FIELD REQUIREMENTS

OSHA 1926 Subpart CC and 1926.251 address lift planning, capacity, rigging, signal persons, exclusion zones and operational control.

OSHA 1926.1417

SAFE OPERATION

Follow manufacturer procedures, load chart, level, configuration and operating limitations.

OSHA 1926.1425

SUSPENDED LOAD

Keep employees clear of the fall zone and allow controlled access only for essential personnel.

OSHA 1926.1428

SIGNAL-PERSON QUALIFICATION

Use a qualified signal person where required and verify the communication method before lifting.

OSHA 1926.251

RIGGING INSPECTION

Inspect slings and hardware each shift and before use; remove defective gear from service.

MINIMUM EVIDENCE BEFORE START

- | | |
|---|--|
| ☐ Approved lifting plan | ☐ Load weight and center of gravity |
| ☐ Crane and rigging certificates | ☐ Pre-shift inspection |
| ☐ Signal-person and rigger qualification | ☐ Exclusion-zone plan |

SUPERVISOR DISCUSSION POINTS

- Has the load weight and centre of gravity been confirmed?
- Is the selected equipment capacity suitable?
- Who are the operator, rigger and signalman?

TRIAL LIFT AND LOAD CONTROL



Plan - Capacity - Rigging - Trial lift - Tag line - Exclusion zone

HSE TOOLBOX TALK

LIFTING OPERATIONS

CRITICAL CONTROL MEASURES (HIERARCHY OF CONTROLS)

1. PLAN THE LIFT

Verify the approved lifting plan and risk assessment. Confirm the load weight and centre of gravity.

2. VERIFY EQUIPMENT AND GROUND

Check crane and accessory capacities. Inspect slings, hooks, shackles and other equipment. Assign competent operators, riggers and signalmen.

3. CONTROL THE LOAD

Barricade the lifting area and exclude personnel. Provide reliable communication for blind lifts. Use tag lines where appropriate.

4. MANAGE AREA AND COMMUNICATION

Complete a trial lift to confirm load stability. Verify wind, ground and environmental conditions.

CRITICAL WARNING



No one may stand below a suspended load or in the line of fire. Stop the lift whenever there is doubt.

SITE CHECKLIST (BEFORE STARTING WORK)

- ☐ Lifting plan approved

☐ Centre of gravity identified

☐ Accessories inspected

☐ Area barricaded

☐ Trial lift planned
- ☐ Load weight confirmed

☐ Equipment capacity suitable

☐ Personnel competent

☐ Communication ready

HSE TOOLBOX TALK

LIFTING OPERATIONS

ATTENDANCE AND APPROVAL

Project / Site:

Date:

Presented by:

Work area:

No	Full Name	Company / Role	Signature
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			