

HSE TOOLBOX TALK

MAN BASKET AND PERSONNEL LIFTING

PURPOSE AND SCOPE

Crane-hoisted personnel lifting is permitted only where conventional access is impossible or creates greater hazard. Equipment setup, platform design, capacity, rigging, trial lift, 125 percent proof test, fall protection, communication and rescue must be verified in one approved lifting plan.

KEY HAZARDS

1



FALL FROM BASKET

2



GATE / GUARDRAIL

3



UNSAFE ENTRY

4



LOOSE MATERIAL

5



CRANE CAPACITY

6



WIND

7



RIGGING FAILURE

8



LOST COMMUNICATION

CRITICAL VALUES TO VERIFY IN THE FIELD

≤ 50%

Permitted crane capacity utilization

125%

Personnel-platform proof test

≤ 1%

Level tolerance for personnel hoisting

REMEMBER - SERNEM

- S

Stop and think
- E

Evaluate the risk
- R

Remove or reduce
- N

Never assume
- E

Ensure protection
- M

Monitor and communicate

HSE TOOLBOX TALK

MAN BASKET AND PERSONNEL LIFTING**STANDARDS AND FIELD REQUIREMENTS**

OSHA 1926.1431 regulates personnel hoisting as an exceptional operation. The lift may not proceed until equipment, platform, rigging, testing and work-practice requirements are met together.

OSHA 1926.1431(a)**LAST-RESORT CONDITION**

Personnel hoisting may be used only when conventional access is more hazardous or impossible because of structural or site conditions.

OSHA 1926.1431(c)-(e)**SETUP AND PLATFORM**

Equipment must be level within one percent on firm ground with stabilizers locked; a qualified person must design the platform.

OSHA 1926.1431(h)-(j)**TRIAL LIFT AND PROOF TEST**

Perform a trial lift each shift and proof-test the platform and rigging at 125 percent of rated capacity at the site.

OSHA 1926.1431(k)-(m)**WORK PRACTICES AND COMMUNICATION**

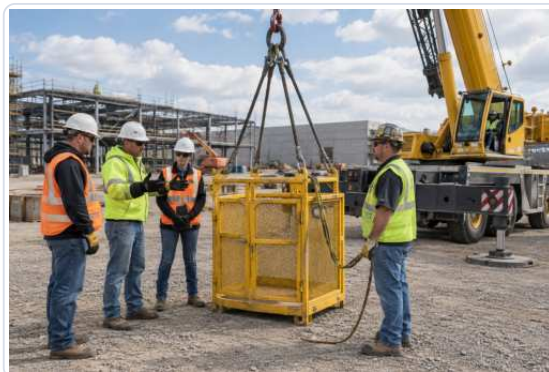
Use slow controlled movement, fall protection, direct communication and a pre-lift meeting at each new location.

MINIMUM EVIDENCE BEFORE START

- | | |
|---|--|
| ☐ Alternative access justification | ☐ Approved lifting plan |
| ☐ Basket design and capacity plate | ☐ 125 percent test record |
| ☐ Trial-lift check | ☐ Pre-lift meeting record |

SUPERVISOR DISCUSSION POINTS

- Why can a safer access method not be used for this task?
- Who stops the operation if wind increases?
- How will an occupant be rescued?

PRE-TRIAL-LIFT PERSONNEL BASKET CHECK

Approved basket - Dedicated rigging - Stabilizers - Trial lift - Communication - Rescue

HSE TOOLBOX TALK

MAN BASKET AND PERSONNEL LIFTING

CRITICAL CONTROL MEASURES (HIERARCHY OF CONTROLS)

1. SELECT SAFER ACCESS

Evaluate scaffolds, MEWPs, stair towers or personnel hoists first.

2. ENGINEER THE LIFT

Use an approved basket, suitable crane, verified ground, stabilizers, load chart and dedicated rigging.

3. TEST AND BRIEF

Complete the trial lift, proof test, balance check and pre-lift meeting.

4. HOIST UNDER CONTROL

Maintain single command, continuous communication, fall protection, weather monitoring and rescue readiness.

CRITICAL WARNING



A personnel basket is not a material-handling accessory. Never hoist people with an unapproved basket, general-purpose rigging, free-fall movement, capacity above 50 percent or without a trial lift.

SITE CHECKLIST (BEFORE STARTING WORK)

- ☐ Alternative access assessment documented

☐ Ground and stabilizers verified

☐ 125 percent proof test valid

☐ Fall protection correctly attached

☐ Rescue plan ready
- ☐ Lifting plan approved

☐ Basket and dedicated rigging certified

☐ Shift trial lift complete

☐ Communication and wind acceptable

HSE TOOLBOX TALK

MAN BASKET AND PERSONNEL LIFTING

ATTENDANCE AND APPROVAL

Project / Site:

Date:

Presented by:

Work area:

No	Full Name	Company / Role	Signature
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			