

# MAN BASKET AND PERSONNEL LIFTING

A last-resort method requiring design, testing, communication and rescue controls.

## PURPOSE AND SCOPE

Crane-hoisted personnel lifting is permitted only where conventional access is impossible or creates greater hazard. Equipment setup, platform design, capacity, rigging, trial lift, 125 percent proof test, fall protection, communication and rescue must be verified in one approved lifting plan.

## KEY HAZARDS

|                                                                                                                    |                                                                                                                    |                                                                                                                     |                                                                                                                         |
|--------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <p>1</p>  <p>FALL FROM BASKET</p> | <p>2</p>  <p>GATE / GUARDRAIL</p> | <p>3</p>  <p>UNSAFE ENTRY</p>     | <p>4</p>  <p>LOOSE MATERIAL</p>      |
| <p>5</p>  <p>CRANE CAPACITY</p>  | <p>6</p>  <p>WIND</p>           | <p>7</p>  <p>RIGGING FAILURE</p> | <p>8</p>  <p>LOST COMMUNICATION</p> |

## CRITICAL VALUES TO VERIFY IN THE FIELD

|                                                                 |                                                         |                                                                  |
|-----------------------------------------------------------------|---------------------------------------------------------|------------------------------------------------------------------|
| <p><b>≤ 50%</b></p> <p>Permitted crane capacity utilization</p> | <p><b>125%</b></p> <p>Personnel-platform proof test</p> | <p><b>≤ 1%</b></p> <p>Level tolerance for personnel hoisting</p> |
|-----------------------------------------------------------------|---------------------------------------------------------|------------------------------------------------------------------|



### REMEMBER - SERNEM

**S**

Stop and think

**E**

Evaluate the risk

**R**

Remove or reduce

**N**

Never assume

**E**

Ensure protection

**M**

Monitor and communicate

# MAN BASKET AND PERSONNEL LIFTING

A last-resort method requiring design, testing, communication and rescue controls.

## STANDARDS AND FIELD REQUIREMENTS

OSHA 1926.1431 regulates personnel hoisting as an exceptional operation. The lift may not proceed until equipment, platform, rigging, testing and work-practice requirements are met together.

### OSHA 1926.1431(a)

#### LAST-RESORT CONDITION

Personnel hoisting may be used only when conventional access is more hazardous or impossible because of structural or site conditions.

### OSHA 1926.1431(c)-(e)

#### SETUP AND PLATFORM

Equipment must be level within one percent on firm ground with stabilizers locked; a qualified person must design the platform.

### OSHA 1926.1431(h)-(j)

#### TRIAL LIFT AND PROOF TEST

Perform a trial lift each shift and proof-test the platform and rigging at 125 percent of rated capacity at the site.

### OSHA 1926.1431(k)-(m)

#### WORK PRACTICES AND COMMUNICATION

Use slow controlled movement, fall protection, direct communication and a pre-lift meeting at each new location.


## MINIMUM EVIDENCE BEFORE START

- |                                                           |                                                  |
|-----------------------------------------------------------|--------------------------------------------------|
| <input type="checkbox"/> Alternative access justification | <input type="checkbox"/> Approved lifting plan   |
| <input type="checkbox"/> Basket design and capacity plate | <input type="checkbox"/> 125 percent test record |
| <input type="checkbox"/> Trial-lift check                 | <input type="checkbox"/> Pre-lift meeting record |

## SUPERVISOR DISCUSSION POINTS

- Why can a safer access method not be used for this task?
- Who stops the operation if wind increases?
- How will an occupant be rescued?

## PRE-TRIAL-LIFT PERSONNEL BASKET CHECK

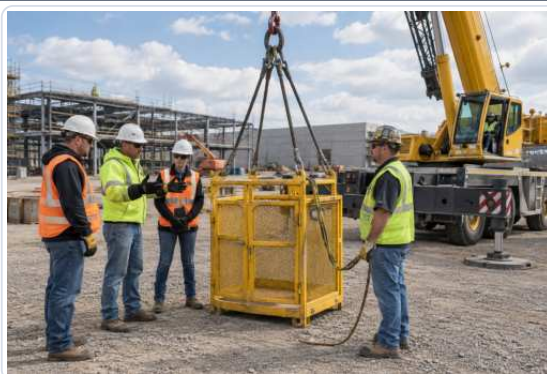

Approved basket - Dedicated rigging - Stabilizers - Trial lift - Communication - Rescue

# MAN BASKET AND PERSONNEL LIFTING

A last-resort method requiring design, testing, communication and rescue controls.

## CRITICAL CONTROL MEASURES (HIERARCHY OF CONTROLS)

### 1. SELECT SAFER ACCESS

Evaluate scaffolds, MEWPs, stair towers or personnel hoists first.

### 2. ENGINEER THE LIFT

Use an approved basket, suitable crane, verified ground, stabilizers, load chart and dedicated rigging.

### 3. TEST AND BRIEF

Complete the trial lift, proof test, balance check and pre-lift meeting.

### 4. HOIST UNDER CONTROL

Maintain single command, continuous communication, fall protection, weather monitoring and rescue readiness.

### CRITICAL WARNING



**A personnel basket is not a material-handling accessory. Never hoist people with an unapproved basket, general-purpose rigging, free-fall movement, capacity above 50 percent or without a trial lift.**

## SITE CHECKLIST (BEFORE STARTING WORK)

- |                                                                   |                                                                 |
|-------------------------------------------------------------------|-----------------------------------------------------------------|
| <input type="checkbox"/> Alternative access assessment documented | <input type="checkbox"/> Lifting plan approved                  |
| <input type="checkbox"/> Ground and stabilizers verified          | <input type="checkbox"/> Basket and dedicated rigging certified |
| <input type="checkbox"/> 125 percent proof test valid             | <input type="checkbox"/> Shift trial lift complete              |
| <input type="checkbox"/> Fall protection correctly attached       | <input type="checkbox"/> Communication and wind acceptable      |
| <input type="checkbox"/> Rescue plan ready                        |                                                                 |



# MAN BASKET AND PERSONNEL LIFTING

A last-resort method requiring design, testing, communication and rescue controls.

## ATTENDANCE AND APPROVAL

Project / Site: \_\_\_\_\_ Date: \_\_\_\_\_

Presented by: \_\_\_\_\_ Work area: \_\_\_\_\_

| No | Full Name | Company / Role | Signature |
|----|-----------|----------------|-----------|
| 1  |           |                |           |
| 2  |           |                |           |
| 3  |           |                |           |
| 4  |           |                |           |
| 5  |           |                |           |
| 6  |           |                |           |
| 7  |           |                |           |
| 8  |           |                |           |
| 9  |           |                |           |
| 10 |           |                |           |
| 11 |           |                |           |
| 12 |           |                |           |